

Specifications

Environmental Performance

Storage Temperature	- 25°C to + 70°C
Operating Temperature	+ 15 to + 40°C
Operating Atmospheric Pressure	10% to 90% non-condensing
Operating Atmospheric Pressure	425 to 850 Torr

Mechanical Specifications

Pressure Range	- 30 to 300 mmHg
Overpressure Withstand	- 400 mmHg to + 4000 mmHg
Mounting	Any axis

Safety Features

Risk Current	Less than 5 uAmps
Defibrillation Withstand	5 discharges in 5 minutes @ 360J

Electrical Performance

Transducer Excitation Voltage	4 to 8 volts RMS
Transducer Supply Frequency	DC to 5000 Hz
Phase Shift	< 5°
Transducer Excitation Impedance	300 to 400 ohms
Transducer Signal Impedance	250 to 350 ohms
Transducer Symmetry	+/- 5%
Accuracy	Meets AAMI / ANSI BP22 (1994) Standard
Sensitivity	5 uV/mmHg
Zero Drift After 5 min Warm-up	< 2 mmHg in 4 hrs
Zero Shift due to Temperature	+/- 10 mmHg maximum*
Light** Sensitivity @ 0 mmHg	< 1 mmHg
Mechanical Shock Withstands	3 falls from 1 meter

*from 15°C to 40°C using 25°C as a reference.
**3,000 foot-candles generated by 3,400K Tungsten source.

Contents

All kits include sterile BIOTRANS™ disposable pressure transducer with integral 3- or 30cc/hr flush device with intergal fast and pressure relief functions. The table below identifies additional components included in sterile, packaged single-use Pressure Monitoring Kits by catalog number. All Luers are supplied protected with vented caps. All required non-vented caps are supplied in a separate pouch within each kit package.

Product Code	Description	Integral Flush Device*	Extension Tubing	Stopcock	Distal Tubing
BTR	Standalone DPT Without Flush Device	None	None	None	None
BTR-30**	Standalone DPT With Flush Device (Infant/Neonatal)	30 cc/hr	None	None	None
BTR-3	Standalone DPT With Flush Device (Adult)	3 cc/hr	None	None	None
BTR 4812-3	Single Monitoring Kit System (Adult)	3 cc/hr	48" (122cm)	3-way	12" (30cm)
BTR2 4812-3	Bifurcated Monitoring Kit System (Adult)	3 cc/hr	48" (122cm)	3-way	12" (30cm)
BTR3 4812-3	Trifurcated Monitoring Kit System (Adult)	3 cc/hr	48" (122cm)	3-way	12" (30cm)
BTR 6012-3	Single Monitoring Kit System with 60" extension tubing (Adult)	3 cc/hr	60" (152cm)	3-way	12" (30cm)

*Flush rates indicated are nominal and were obtained with 300mmHg pressure.
Fast Flush rates vary with the type of administration set and length and lumen diameter of the monitoring tubing catheter.
**Kits supplied with 30cc/hr (yellow banded) flush devices are intended for infant and neonatal applications.
Note: Please contact our Bioptimal Sales Representative for custom kits to meet your special requirements.


Reusable BIOTRANS™ Accessories

Product Code	Description
HM650-150	Vertical Mounting Clamp for IV Poles up to 4cm diameter
HM650-150-H	Horizontal Mounting Clamp for IV Poles up to 4cm diameter
HM650-150-R	Rotatable Mounting Clamp for IV Poles up to 4cm diameter in both vertical and horizontal application
BT-201	BIOTRANS II Sensor Base(reusable) with integrated 25cm sensor cable is designed for patient or pole mount applications
PMA-1	Replacement Docking Bracket that holds 1 transducer at one time
3-in-1 Backplate	Transducer Holder that holds up to 3 transducers at one time
MAC-XX***	3.05m Monitor Adapter Interface Cables for specific brands of monitors

***Please contact your Bioptimal representative for assistance.

BIOTRANS™

Blood Pressure Transducer

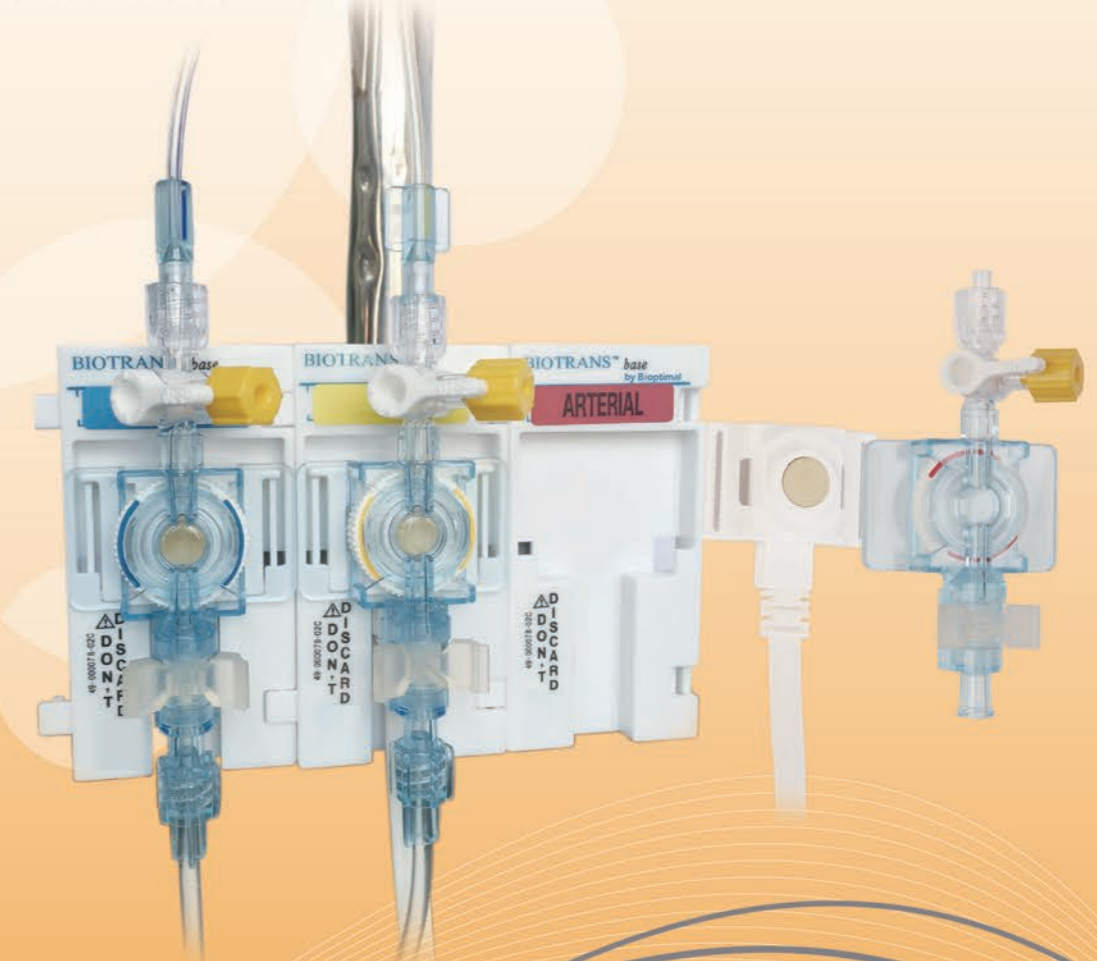

Bioptimal™

BIOPTIMAL INTERNATIONAL PTE. LTD.

36 Jalan Tukang
Singapore 619266
Tel: +65 6213 5777
Fax: +65 6213 5737
Email: sales@bioptimalg.com



www.bioptimalg.com

BIOTRANS™

The Disposable / Reusable Blood Pressure Transducer System

Performance in a
cost-effective package.




Delivering greater convenience and cost savings in your environment


BIOTRANS™ provides superior performance in many hospital environments—including the accounting departments. That's because BIOTRANS™ is the blood pressure transducer that combines the performance, quality and ease-of-use of a fully disposable blood pressure transducer with cost savings of a reusable system.

BIOTRANS™ also incorporates a number of intelligent and exclusive features for saving care-givers valuable time. TOUCH CHECK™, for example, lets you quickly check the operating status of your BIOTRANS™ re-usable, its pressure display after one use, after multiple uses, or at the time of the monitoring procedure. You simply won't find anything like TOUCH CHECK™ on conventional disposable transducers.

BIOTRANS™ was also engineered to help save the environment. Unlike fully disposable transducers, BIOTRANS™ disposable pressure monitoring kits contain no heavy metal wastes.

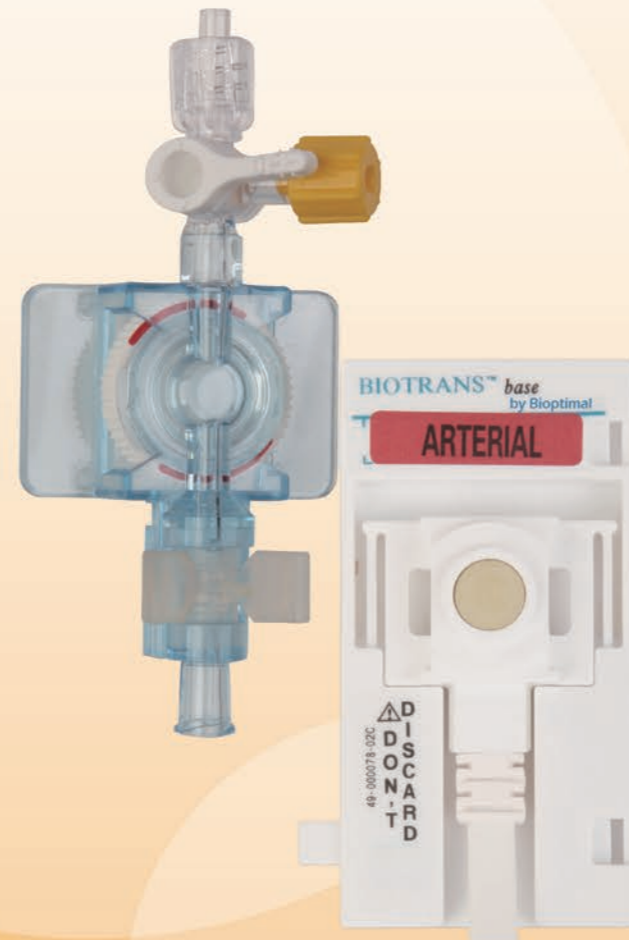

Flexibility is the driving force behind our modular, "twist on" locking-dome design

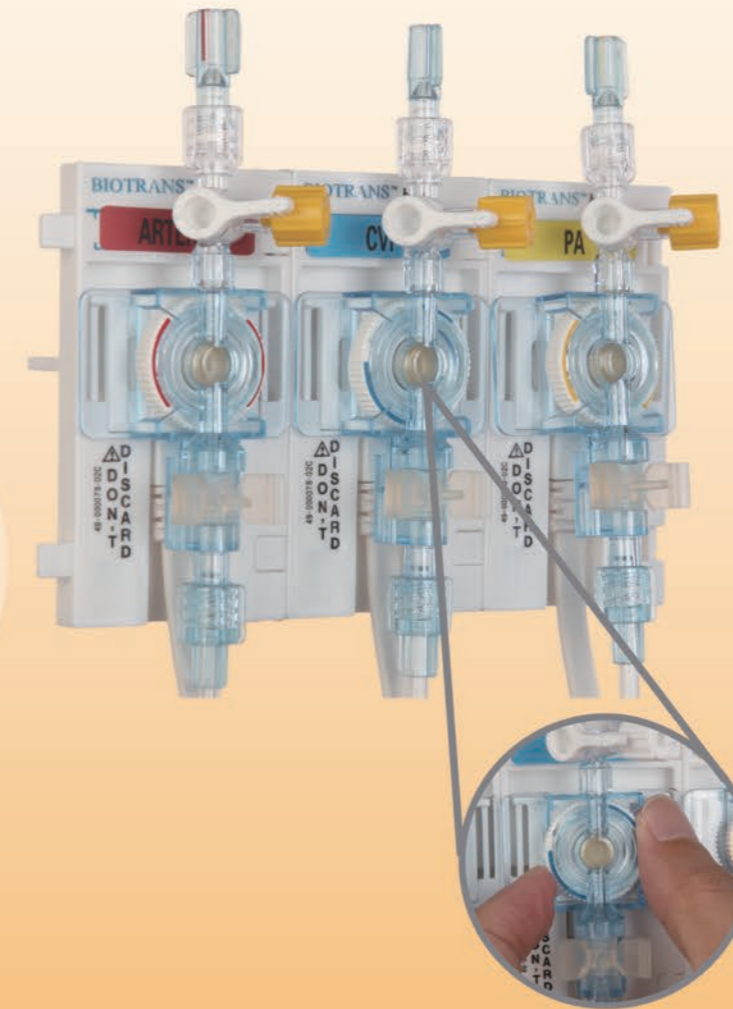

BIOTRANS™ was designed to work in the most challenging monitoring environments including OR/Anesthesia, ICU, ER, and Cath Lab. For greater versatility, the BIOTRANS™ transducer was its unique twist on dome and reusable sensor can be pole-mounted in single or multiple sets. Alternatively, BIOTRANS™ is the re-usable sensor that's small enough to fit comfortably on a patient's arm.

BIOTRANS™ is easily transported from one environment to another, with two conventional methods to choose from. First, you can unlock the pressure monitoring dome with its integral sterile isolating membrane. Second, you may choose to move the entire transducer and cable, as it is typically done with a disposable. This flexibility can save substantial nursing time and related set-up costs.

At work for your environment BIOPTIMAL Innovation service and care for the environment

BIOTRANS™ sensors are designed for years of rugged use in your hospital environment while minimizing biological waste. Standard and custom kits are available to meet your specific monitoring needs.

Every BIOPTIMAL product is backed by our comprehensive warranty – plus expert service and support that continue long after your purchase.

To discover how we can transform your environment, please contact us at the location shown overleaf.

